

AKR 504 IX

12NC: 857850401000

GTIN (EAN) code: 8003437203589

Whirlpool

SENSING THE DIFFERENCE



Whirlpool island cooker hood: 100cm - AKR 504 IX

This Whirlpool island Cooker Hood features: dishwasher-safe, washable aluminium grease filters. LED lights for ideal lighting. An outstanding cooker extractor fan, ensuring a fresh, grease-free cooking environment. More than 90cm wide appliance. Exclusive 6th SENSE sensor technology that dynamically adjusts energy consumption, depending on what you are cooking.

LED lighting

Increased energy and cost efficiency. The LED lighting system lasts 10 times longer than traditional bulbs and uses 90% less energy.

Electronic control

Effortless control. This Whirlpool Hood includes an intuitive electronic user interface, designed to provide you with the simplest, most satisfying user experience ever.

High efficiency motor

Efficiency first. The motor in this Whirlpool Hood is designed to provide ideal filtration, while ensuring high energy efficiency.

4 Speeds

Versatile performance. This Whirlpool Hood offers 4 speed options, giving you complete control over the extraction rate.

Island installation

Outstanding beauty. This island-style hood is easy to install above your island cooker. Its design ensures it will be the centrepiece of your kitchen.

Total annual energy consumption

Ideal performance, outstanding savings. Whirlpool Hoods are designed to provide exceptional results, while reducing energy costs.

6th sense


Exceptional energy savings. The exclusive 6th SENSE technology allows your hood to dynamically adjust its energy consumption, based on what you are cooking.

Flexible Installation

Flexible installation options. This Whirlpool Hood can be operated in either Ducted or Recirculated mode (filter needed), so you can enjoy complete freedom when designing your kitchen.

Touch control user interface

Intuitive controls. The stylish touch-control user interface provides simple, immediate access to all of your hood's settings and functions.

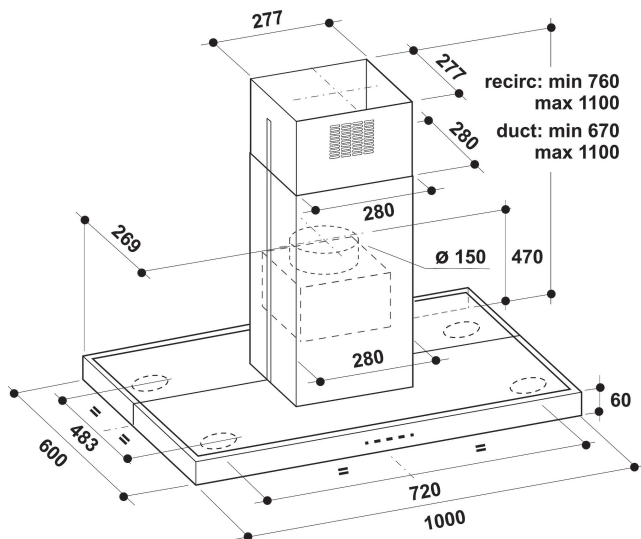

- 6TH Sense technology
- Maximum noise level 69 dBA
- Noise Level (min. - max.): 52-69 dBA
- Air Flow (min. - max.): 304, 581, booster 713 m³/h
- Maximum extraction rate: 581 (m³/h)
- Energy class B
- Extraction / Recirculation Rate
%Z_REQ_MAX_OUT_EXTRACTION% / 343 m³/h
- Speeds: 4 + Booster
- 4 LED, 10 W lamps
- 1 x 260 W motor
- Electronic Touch control
- 3 Washable aluminium filters
- Grease Filtering Efficiency Class: C
- Lighting Efficiency Class: A
- Fluid Dynamic Efficiency Class: B
- Operating Mode: Air extraction, Recirculating air

AKR 504 IX

12NC: 857850401000

GTIN (EAN) code: 8003437203589

Whirlpool

SENSING THE DIFFERENCE

MAIN FEATURES

Product group	Hood
Colour body	Inox
Material body	Stainless steel
Colour chimney	Inox
Material chimney	Stainless steel
Typology	Island/Ceiling
Installation type	Island
Type of control	Electronic
Type of control settings	-
Decor panel options	N/A
Motor location	Integrated motor in hood chimney
Operating Mode	Convertible
Electrical connection rating (W)	270
Current (A)	1,2
Voltage (V)	220-240
Frequency (Hz)	50
Length of Electrical Supply Cord (cm)	150
Plug type	Schuko
Chimney height (mm)	560
Height of product, without chimney (mm)	60
Height of the product	772
Width of the product	1000
Depth of the product	600
Minimum niche height	0
Minimum niche width	0
Niche depth	0
Net weight (kg)	30.5

TECHNICAL FEATURES

Type of manual control devices	Touch control
Type of automatic control devices	-
Number of motors	1
Total power of the motors (W)	260
Number of speed settings: boost option availability	4
Boost presence	Yes
Maximum output air extraction (m ³ /h)	581
Boost position air extraction (m ³ /h)	713
Maximum output recirculating air (m ³ /h)	343
Boost position output recirculating (m ³ /h)	352
Light Control Type	On/Off
Number of lights	4
Type of lamps used	LED
Total power of the lamps (W)	10
Diameter of air outlet (mm)	0
No-return airflow flap	No
Grease filter material	Washable aluminium
Odour filter	No

PERFORMANCES

Sound power at min. speed (2010/30/EU)	52
Sound power at max. speed (2010/30/EU)	69
Noise level with boost position (dB(A) re 1 pW)	0

